


700 Elevation Table

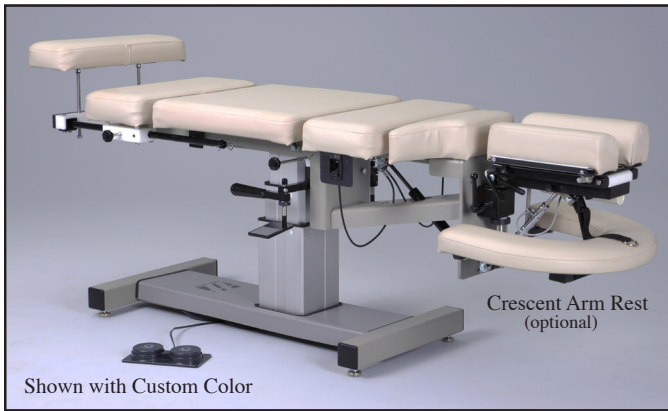

Sophisticated in appearance, the 700 Elevation features an Abdominal Swing-Away, allowing pregnant women to comfortably lie prone again. Also accommodates those with a little extra around the middle. With smooth and quiet vertical height adjustability at the touch of a foot switch, you can optimally position each patient.

NOTE: Elevation tables are eligible for a significant tax credit under the **IRS Disabled Access Tax Credit** (Form 8826).

COLORS

Black, Navy Blue, Burgundy and Espresso
Custom Colors are also available

HEIGHT CHOICES (includes wheels)

18" - 28" / 29" - 29" / 20" - 30" / 21" - 31"

ACCESSORIES

Crescent Arm Rest
Comfort Pillow
Headpiece Extension Pillow
Electrical Cord Cover
Custom Logo

700 ELEVATION FEATURES

Headpiece

- Flexion: 0 -14°, Extension: 0 - 20°
- Vertical Elevation: 0 - 6" (0 -15 cm)
- Straight Drop & Forward Motion Drop: 0.62" (16 mm) drop height, adjustable tension
- Lateral Motion: 0 - 25° right and left
- Compound angle possible, locks into position
- Contoured cushions are adjustable in width at front end. 3.25" thick: 0.5" soft foam laminated to 2.75" firm foam
- Paper Hanger, Hold-Down & Tear-Off Bar, one roll of headpiece paper (8.5") provided

Prone Arm Rest

- Adjustable position

Thoracic Section

- Fixed, contoured with slight ergonomic incline

Abdominal Swing-Away

- Swing-Away from 0 - 7" (0 - 18 cm)
- Easily operable from both sides of table
- Locks into position at any angle
- 10" x 20"

Pelvic Drop

- Drop height of 0.7" (18 mm) at front, adjustable tension
- Does not incline
- 20" x 20"

Ankle Rest Extension & Elevation

- Adjustable Extension: 0 -12" (0 - 31 cm), locks into position
- Adjustable Elevation: 0 - 6" (0 -15 cm), locks into position
- 7" x 20"

Operating Levers / Tension Control

- Foot cocking pedals & fold-away hand cocking levers on both sides
- Adjustable tension control on one side (patient's right while prone)

700 ELEVATION SPECIFICATIONS

Base Size:	19" x 39" (48 x 99 cm)
Table Length:	68" - 80" (173 - 203 cm) with Ankle Rest extended
Table Width:	20" (51 cm)
Wheels:	Locking & swiveling, 3" diameter, non-marking, polyurethane
Weight:	250 lbs (114 kgs)
Base:	Grey Metal, 19" x 39" (48 - 99 cm)
Foam:	2.25" (5.7 cm) thick, medium firm, high resiliency
Upholstery:	Tailored sewn Naugahyde vinyl
Drop Mechanism:	Adjustable compression spring, stainless steel plunger in high density polyethylene housing
Box sizes:	56" x 26" x 19" (142 x 66 x 48 cm) 28" x 22" x 16" (71 x 56 x 41 cm)
Shipping weight:	290 lbs (132 kgs)
Assembly Time:	15 minutes, tools included. Shipped partially disassembled to insure maximum protection in transit and to reduce shipping expense.

ELECTRIC LIFT MOTOR SPECIFICATIONS

Weight capacity:	900 lbs (409 kgs)
Vertical Travel:	0 -10" (0 - 25 cm), quiet & smooth
Vertical Speed:	Approx. 1" (2.5 cm) per second
Construction:	Swiss-engineered & manufactured, aluminum telescoping columns, worm-gear linear drive
Electrical:	110 or 230 Volts
Switch:	Electropneumatic foot switch (black)
Cord:	10 ft hospital-grade cordset with ground, Grey
Cord Cover:	6 ft, Grey (optional)
Warranty:	Limited Lifetime

